

ATTENTION: DIGITAL INDICATOR USES RECHARGEABLE BATTERY, FOR 24 HOURS CONTINUOUS WORKING


PROBE AND PLATFORM CAN BE CUSTOMIZED

DATA OUTPUT



MEASURING FORCE CAN BE CUSTOMIZED, MINIMUM MEASURING FORCE IS 2N

DIGITAL INDICATOR USES ABSOLUTE ENCODER, THE ORIGINAL DATA REMAINS AFTER POWER OFF

HORIZONTAL MEASURING BENCH

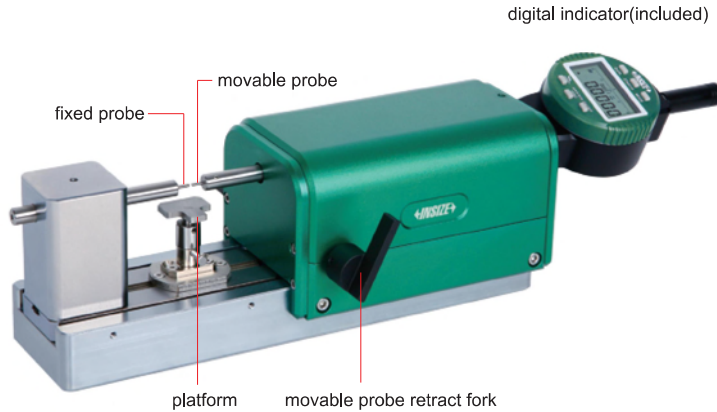

6849-60

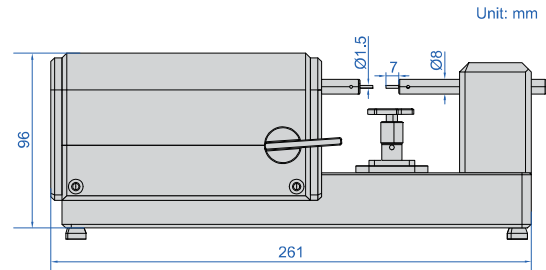

- Quickly measure outside diameters
- The platform can move horizontally and the height is adjustable
- For left and right hand operation
- Carbide probes
- Digital indicator uses linear ball bearings and can be used ten million times
- Digital indicator uses absolute encoder, the original data remains after power off
- Digital indicator reading in digital and analog
- Data output
- Digital indicator button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, mm/inch, resolution adjustment
- Digital indicator uses rechargeable battery, for 24 hours continuous working
- Optional accessory:
wireless transmitter(code **7315-60**, receiver is needed code **7315-2/3/6/7/8/9**), data output cable (code **7302-60**, keyboard format)

Code	Range	Movable probe travel	Resolution	Accuracy	Any ±1mm accuracy*	Repeatability	Measuring force	Weight
6849-60	0-60mm	20mm	0.0002mm/0.00001"	3µm	0.6µm	0.4µm	2N	6.4kg

*After set zero at any position, accuracy is 0.6µm within ±1mm from zero position