


ATTENTION: CLOCKWISE
OPERATION ONLY



TORQUE WRENCHES

- According to DIN ISO 6789, ASME B107.300
- Ratchet head
- Dual window design with clear scale
- Non-slip grip handle
- Push-pull locking device, easy to operate

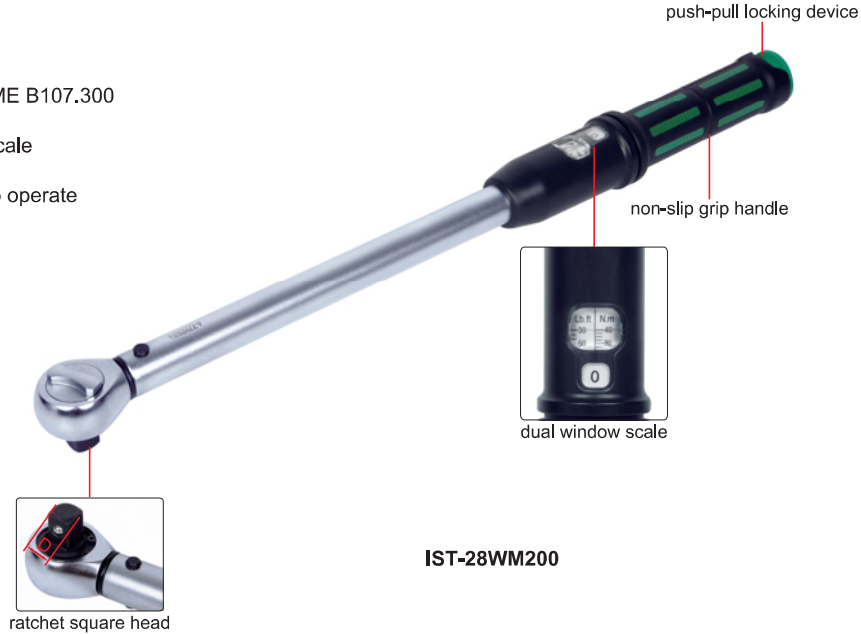

IST-28WM200

SPECIFICATION

Code	IST-28WM25	IST-28WM50	IST-28WM60	IST-28WM100	IST-28WM150	IST-28WM200	IST-28WM300
Range (clockwise)	5~25N.m	10~50N.m	10~60N.m	20~100N.m	30~150N.m	40~200N.m	60~300N.m
Accuracy	±3%	±3%	±3%	±3%	±3%	±3%	±3%
Graduation	0.2N.m	0.5N.m	0.5N.m	0.5N.m	1N.m	1N.m	1.5N.m
Square driver (D)	1/4"	3/8"	3/8"	1/2"	1/2"	1/2"	1/2"
Length	321mm	387mm	387mm	433mm	463mm	491mm	551mm
Weight	820g	1000g	1000g	1100g	1200g	1250g	1400g

Code	IST-28WM340	IST-28WM400	IST-28WM550	IST-28WM750	IST-28WM1000	IST-28WM1500
Range (clockwise)	60~340N.m	80~400N.m	100~550N.m	150~750N.m	200~1000N.m	300~1500N.m
Accuracy	±3%	±3%	±3% (≤500N.m) ±4% (>500N.m)	±3% (≤500N.m) ±4% (>500N.m)	±3% (≤500N.m) ±4% (>500N.m)	±3% (≤500N.m) ±4% (>500N.m)
Graduation	2N.m	2N.m	3N.m	5N.m	5N.m	10N.m
Square driver (D)	1/2"	1/2"	3/4"	3/4"	3/4"	1"
Length	551mm	700mm	807mm	1105mm	1105mm	1260mm
Weight	1400g	1650g	3100g	4000g	4000g	4500g