



## DIGITAL TORQUE WRENCHES (BASIC TYPE)

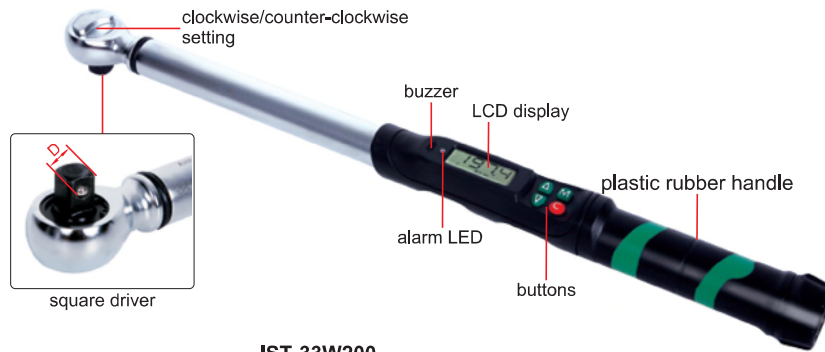


**IST-33W200  
type A**

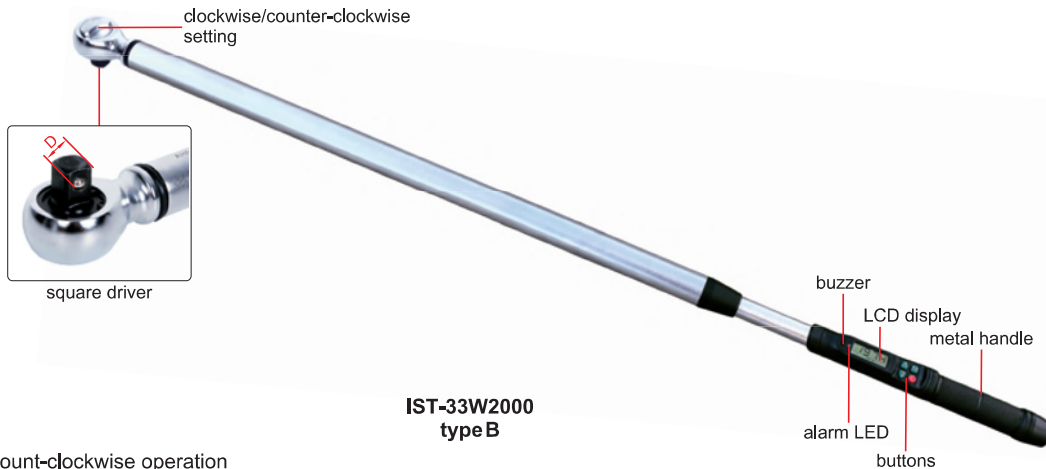

**IST-33W2000  
type B**

- Clockwise and count-clockwise operation
- Unit: N.m, lb.in, lb.ft
- Peak and track working mode
- Target torque value can be set, with audible and visible alarm (alarm LED and buzzer):
  - Yellow LED light on when approaching target value,
  - green LED light on when reaching target value,
  - red LED light on when exceeding target value
  - Intermittent alarm when approaching target value,
  - rapid alarm when reaching target value,
  - long-lasting alarm when exceeding target value
- Real-time display of % difference from target value when approaching
- Power off automatically in 2 minutes without any operations

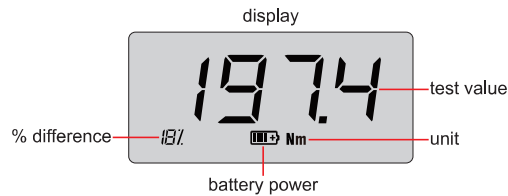

### SPECIFICATION

Code	Type	Range	Accuracy	Resolution	Square driver (D)	Power supply	Length	Weight
IST-33W20	A	2~20N.m	clockwise: ±2% counter-clock wise: ±3%	0.01N.m	1/4"	3×AAA batteries	393mm	800g
IST-33W30		3~30N.m		0.01N.m	3/8"		405mm	830g
IST-33W50		5~50N.m		0.01N.m	3/8"		445mm	920g
IST-33W100		10~100N.m		0.1N.m	3/8"		475mm	980g
IST-33W200		20~200N.m		0.1N.m	1/2"		515mm	1100g
IST-33W300		30~300N.m		0.1N.m	1/2"		583mm	1250g
IST-33W400	B	40~400N.m	clockwise: ±2% counter-clock wise: ±3%	0.1N.m	3/4"		800mm	3300g
IST-33W600		60~600N.m		0.1N.m	3/4"		1050mm	4600g
IST-33W800		80~800N.m		0.1N.m	3/4"		1250mm	5200g
IST-33W1000		100~1000N.m		0.1N.m	3/4"		1250mm	5200g
IST-33W1500		150~1500N.m		1N.m	1"		1265mm	6100g
IST-33W2000		200~2000N.m		1N.m	1"		1265mm	6500g