


# STANDARD TEST BLOCK FOR ULTRASONIC FLAW DETECTION

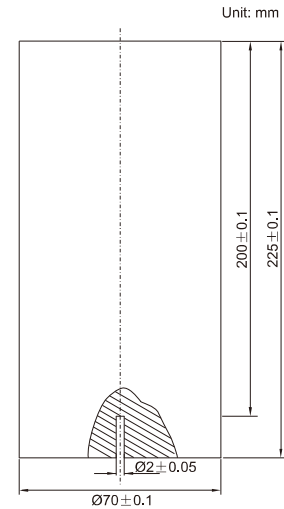

- The test block is used to determine sensitivity margins of straight probe and instrument's comprehensive performances, to adjust sensitivity of flaw detection, to determine sizes of defects and to determine performances indicators and their shapes, e. g. vertical linearity, of instrument

## SPECIFICATION

(mm)

Code	Material	Diameter	Lengths	Apertures (hole depth)
UFD-CS1-5	45#	Ø70	225	Ø2 (25)