


# DIGITAL UNIVERSAL MICROMETERS

DATA  
OUTPUT

NON-ROTATING  
SPINDLE



3580-25A

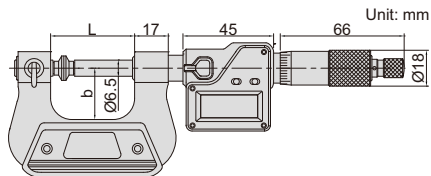

- Resolution 0.001mm/0.00005"
- Non-rotating spindle
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- Automatic power off
- Ratchet stop
- Supplied with 7 pairs of anvil/spindle tip
- Setting standards are included (except 0-25mm/0-1")
- Optional accessory: 55° anvil/spindle tip code **3280-SP1** and **3280-SP2**, data output cable (code **7315-30**, **7302-30**)

Code	Range	Accuracy	L	b
<b>3580-25A</b>	0-25mm/0-1"	±4µm	42	26
<b>3580-50A</b>	25-50mm/1-2"	±4µm	67	38
<b>3580-75A</b>	50-75mm/2-3"	±5µm	92	50
<b>3580-100A</b>	75-100mm/3-4"	±5µm	118	62
<b>3580-125A</b>	100-125mm/4-5"	±6µm	143	70
<b>3580-150A</b>	125-150mm/5-6"	±6µm	168	82
<b>3580-175A</b>	150-175mm/6-7"	±7µm	192	95
<b>3580-200A</b>	175-200mm/7-8"	±7µm	217	107

Anvil/spindle tip (included)

Unit: mm

Flat		
Spherical		
Spline		
Disk		
Blade		
Knife-edge		
Point		

55° anvil/spindle tip (optional)

Unit: mm

Code <b>3280-SP1</b> Knife-edge		
Code <b>3280-SP2</b> Point		