



數位式量表(多功能)




數據
傳輸

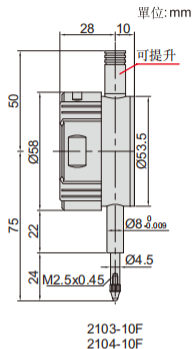

2103-10F




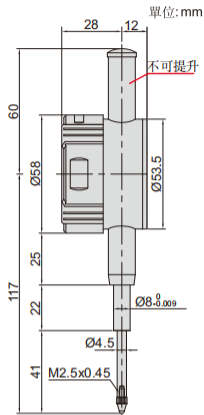


2103-25F

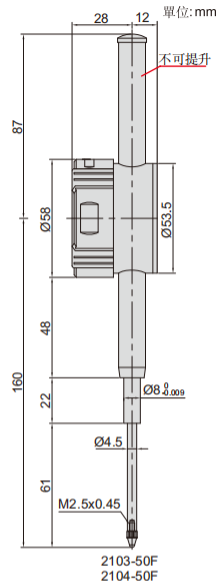

2103-50F

- 模擬指針顯示
- 顯示屏可旋轉320°
- 按鍵功能: 設置公差并顯示Go/No-Go, 設置初始值, 測量方向轉換, 最大值/最小值/跳動, 公/英制轉換, 相對/絕對測量轉換
- 重啓后仍保留預先設置的初始值和公差
- CR2032電池, 自動關機(關機時間可調)
- 數據傳輸
- 可選附件: 數據連接線(型號7315-50M需選配接收部, 7302-40M, 7305-40M), 后蓋, 測頭



解析度: 0.001mm/0.00005"

型號	測定範圍	全程精度	回程精度	最大測量力	備注
2103-10F*	12.7mm/0.5"	5µm	2µm	1.5N	平后蓋
2103-25F*	25.4mm/1"	5µm	3µm	2.2N	平后蓋
2103-50F*	50.8mm/2"	6µm	3µm	2.5N	平后蓋

解析度: 0.01mm/0.0005"

型號	測定範圍	全程精度	回程精度	最大測量力	備注
2104-10F*	12.7mm/0.5"	20µm	10µm	1.5N	平后蓋
2104-25F*	25.4mm/1"	20µm	10µm	2.2N	平后蓋
2104-50F*	50.8mm/2"	30µm	10µm	2.5N	平后蓋

*帶生產廠檢驗證書