

數位兩點/三點式內徑測微器



測微器固定座配夾持塊(選配)



校對環規




6-100mm標配環規
100-150mm不配環規, 需另購

延長杆(標配)




3127-12



B型
6-12mm
鋼測量面
三點式




3127-40

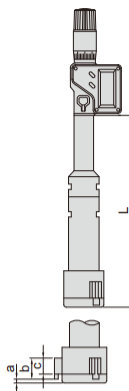

C型
12-50mm,
硬質合金測量面
三點式



3127-125

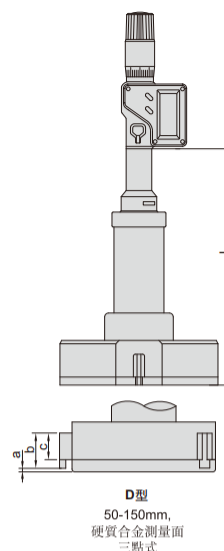

D型
50-150mm,
硬質合金測量面
三點式

- 防塵/防水等級: IP65
- 按鍵: 開/關, 初始值設置, 公/英制轉換, 數據輸出
- 數據傳輸, 自動關機, 棘輪測力
- 可選附件: 數據連接線(型號7315-31需選配接收部, 7302-31), 校對環規(型號6312), 測微器固定座和夾持塊(型號6301和6301-2)

單支

型號	測定範圍	類型	解析度	精度	校對環規	延長杆(標配)	L	a	b	c
3127-8*	6-8mm/0.24-0.31"	B(三點)	0.001mm/0.00005"	4μm	Ø6(標配)	100	57	1.5	2.5	—
3127-10*	8-10mm/0.31-0.39"	B(三點)	0.001mm/0.00005"	4μm	Ø8(標配)	100	57	1.5	2.5	—
3127-12*	10-12mm/0.39-0.47"	B(三點)	0.001mm/0.00005"	4μm	Ø10(標配)	100	57	1.5	2.5	—
3127-16*	12-16mm/0.47-0.63"	C(三點)	0.001mm/0.00005"	4μm	Ø16(標配)	150	99	0.5	6	4.5
3127-20*	16-20mm/0.63-0.79"	C(三點)	0.001mm/0.00005"	4μm	Ø16(標配)	150	99	0.5	6	4.5
3127-25*	20-25mm/0.79-0.98"	C(三點)	0.001mm/0.00005"	4μm	Ø25(標配)	150	105	0.5	8	6
3127-30*	25-30mm/0.98-1.18"	C(三點)	0.001mm/0.00005"	4μm	Ø25(標配)	150	105	0.5	8	6
3127-40*	30-40mm/1.18-1.57"	C(三點)	0.001mm/0.00005"	4μm	Ø40(標配)	150	110	0.5	14	12
3127-50*	40-50mm/1.57-1.97"	C(三點)	0.001mm/0.00005"	5μm	Ø40(標配)	150	110	0.5	14	12
3127-63*	50-63mm/1.97-2.48"	D(三點)	0.001mm/0.00005"	5μm	Ø62(標配)	150	127	0.5	17.5	14.5
3127-75*	62-75mm/2.44-2.95"	D(三點)	0.001mm/0.00005"	5μm	Ø62(標配)	150	127	0.5	17.5	14.5
3127-88*	75-88mm/2.95-3.46"	D(三點)	0.001mm/0.00005"	5μm	Ø87(標配)	150	127	0.5	17.5	14.5
3127-100*	87-100mm/3.43-3.94"	D(三點)	0.001mm/0.00005"	5μm	Ø87(標配)	150	127	0.5	17.5	14.5
3127-125*	100-125mm/3.94-4.92"	D(三點)	0.001mm/0.00005"	6μm	選配	150	175	0.9	29	25
3127-150*	125-150mm/4.92-5.91"	D(三點)	0.001mm/0.00005"	6μm	選配	150	175	0.9	29	25

套裝

型號	測定範圍	包含的測微器	校對環規(標配)	延長杆(標配)
3127-123*	6-12mm	6-8mm, 8-10mm, 10-12mm	Ø6mm, Ø8mm, Ø10mm	100mm
3127-202*	12-20mm	12-16mm, 16-20mm	Ø16mm	150mm
3127-504*	20-50mm	20-25mm, 25-30mm, 30-40mm, 40-50mm	Ø25mm, Ø40mm	150mm
3127-1004*	50-100mm	50-63mm, 62-75mm, 75-88mm, 87-100mm	Ø62mm, Ø87mm	150mm

*帶生產廠檢驗證書



3127-202