


# **DIGITAL MEASURING MICROSCOPES (BASIC TYPE)**

- 1080P high-definition image
  Built-in software without computer, operated by mouse
- Take pictures, save to USB flash disk
- Measurement results can be sent to Excel
- Brightness, contrast ratio, gain are adjustable



glass calibration rule (graduation 0.1mm, included)




white/black plate (included)



16G USB flash disk (included)



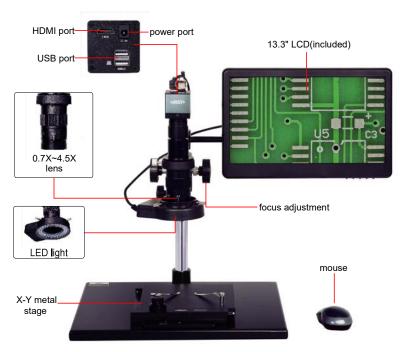

5318-MD60-XY (with stage)

#### SPECIFICATION

SF ECII ICATION		
Code	5318-MD60 (without stage)	5318-MD60-XY (with stage)
Magnification	12.5X~80X	12.5X~80X
Sensor	1/2.8" CMOS	1/2.8" CMOS
Pixel	2M	2M
Resolution	1920×1080	1920×1080
Frame rate	60fps	60fps
Measuring accuracy	±0.02mm	±0.02mm
Lines	Cross lines, scale lines (number, color and position of lines are adjustable)	Cross lines, scale lines (number, color and position of lines are adjustable)
Output	HDMI	HDMI
Power supply	Power adapter	Power adapter
Dimension (L×W×H)	380×260×350mm	570×300×430mm
Weight	4.5kg	10kg

#### STANDARD DELIVERY

Code	5318-MD60 (without stage)	5318-MD60-XY (with stage)
Main unit	1 pc	1 pc
0.5X camera adapter	1 pc	1 pc
1X auxiliary objective	1 pc	1 pc
White/black plate	1 pc	1 pc
Glass calibration rule	1 pc	1 pc
16G USB flash disk	1 pc	1 pc
Mouse	1 pc	1 pc
HDMI cable	1 pc	1 pc
Power adapter	3 pcs	3 pcs
X-Y metal stage	1	1 pc

### **MAGNIFICATION AND VIEW FIELD**

Auxiliary	Specification	Camera adapter
objective		0.5X (included)
0.5X (optional)	Magnification	6.2~40X
	View field	47×26~7.4×4mm
1X (included)	Magnification	12.5~80X
	View field	23.5×13~3.7×2mm
2X (optional)	Magnification	25~160X
	View field	11.8×6.5~1.8×1mm

#### **OPTIONAL ACCESSORY**

0.5X auxiliary objective	5318-OB05X
2X auxiliary objective	5318-OB2X

## MEASURING SOFTWARE (INCLUDED)

