

# AIR GAGE DISPLAY (BASIC TYPE)



- Can store 9 measuring programs, and the programs can be switched quickly
- Data storage function, 99 groups data can be stored




air filter (optional)



pressure regulating valve (optional)




RS232 cable (optional)

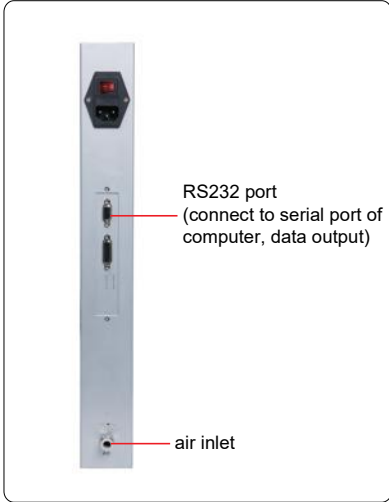

back of 9416-2




foot switch (optional) (for data transmission)

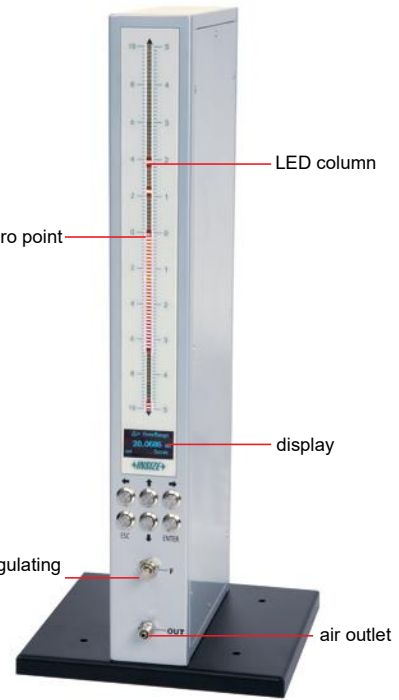

9416-2

## SPECIFICATION

<b>Code</b>	<b>9416-1</b> (without data output)	<b>9416-2</b> (with data output)		
<b>LED quantity</b>	101 pcs			
<b>LED color</b>	red, orange, green			
<b>LED height</b>	254mm			
<b>Range, resolution and accuracy</b>	range	resolution		accuracy
		LED	display	
	10µm	0.1µm	0.1µm	0.2µm
	20µm	0.2µm	0.1µm	0.4µm
	50µm	0.5µm	0.5µm	1µm
100µm	1µm	0.5µm	2µm	
<b>Unit</b>	mm, µm			
<b>Air supply</b>	dry and clean, 0.4~0.8MPa			
<b>Data interface</b>	/	RS232		
<b>Operation temperature</b>	-20~45°C			
<b>Power supply</b>	220V, 50Hz			
<b>Dimension (LxWxH)</b>	200×200×480mm			
<b>Weight</b>	3kg			

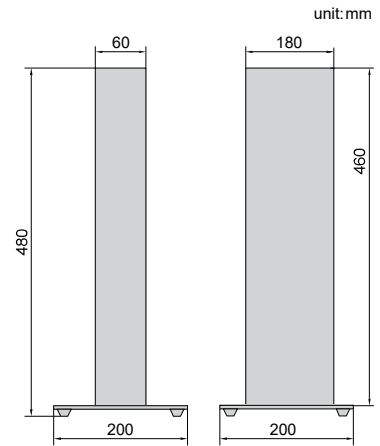

## STANDARD DELIVERY

<b>Main unit</b>	1pc
------------------	-----

## OPTIONAL ACCESSORY

<b>Air filter</b>	<b>9401-FILTER-A</b>
<b>Pressure regulating valve</b>	<b>9404-PRV</b>
<b>RS232 cable</b>	<b>9416-CB</b>
<b>Foot switch</b>	<b>9416-FS</b> (requires pre-shipment installation)
<b>Data output cable(keyboard format)</b>	<b>7302-9416</b>